

MECHFORTE

COLDTEC & CATERING



麥科迪冷凍及餐飲設備（香港）有限公司

Mechforte Coldtec & Catering Equipment (HK) Limited



LA FIAMMA

飞焰马

CATALOGUE
产品画册

沟风炒炉

GUANGDONG STYLE
AIR BLAST TYPE
WOK RANGE



- 选用预混和沟风炉头，火焰旋转稳定，高效；
- 沟风炉头设计，炉头底锥形设计，噪音低，炉头底，易拆卸；
- 炉膛：模具制作耐火围身炉砖，炉膛底砖，烟道砖组合，保温好、耐用可靠。
- 台面炮台、左右则臂、前臂整体成形，无缝制作，卫生美观；
- 电子点火及熄火保护；材料为SUS304，台面采用足1.5mm304不锈钢
- 全1.5-2.0不锈钢框架结构，尺寸可控，不变形，耐用可靠。
- 火力爆炸性燃烧，火力猛速度快，噪音大，气势雄，符合老厨师习惯

- The premixed and blowing stove head is selected, and the flame rotation is stable and efficient;
- Furnace head design, stove bottom conical design, low noise, stove bottom, easy to disassemble;
- Furnace: mold making refractory surrounding furnace bricks, furnace bottom bricks, flue bricks combination, good heat preservation, durable and reliable;
- The table turret, left and right arms, and forearms are formed as a whole, which is seamlessly made, hygienic and beautiful;
- Electronic ignition and flame-out protection; The material is SUS304, and the top is made of 1.5mm304 stainless steel;
- Full 1.5-2.0 stainless steel frame structure, size controllable, no deformation, durable and reliable;


- The fire is explosive and burning, the fire is fierce and fast, the noise is loud, and the momentum is majestic, which is in line with the habits of old chefs.



沟风炉头

Single Burner


粤式燃气单头单尾炒炉 (沟风炉头)

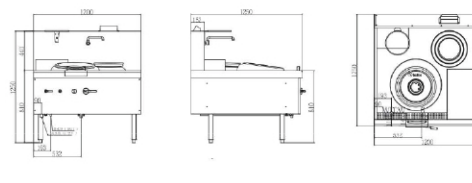

型号 Model	SZC48-DHG		
尺寸 Dimension (WxDxH)mm	1200 × 1250 × (810+360)	炉前压力 Operating Pressure	
热负荷 Heat Input	48kW	天然气 Natural Gas	2000pa
来/去水接口 Water Inlet	φ15mm / φ56mm	石油气 L.P. Gas	2800pa
电源接驳 Loading/Voltage	0.15kW/220V/1Ph/50Hz	煤气 Town Gas	1200pa
燃气接驳 Fuel Pipe Connection	DN20		

Double Burner


粤式燃气双头双尾炒炉 (沟风炉头)

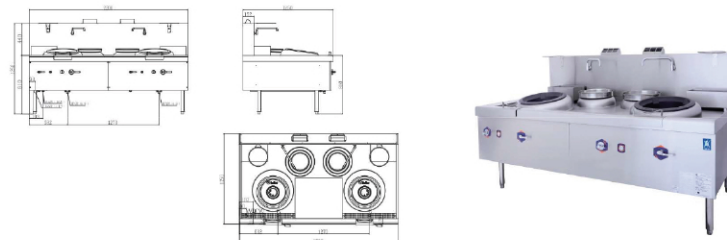

型号 Model	SZC48/96-DHG		
尺寸 Dimension (WxDxH)mm	2200 × 1250 × (810+360)	炉前压力 Operating Pressure	
热负荷 Heat Input	48kWx2	天然气 Natural Gas	2000pa
来/去水接口 Water Inlet	φ15mm / φ56mm	石油气 L.P. Gas	2800pa
电源接驳 Loading/Voltage	0.30kW/220V/1Ph/50Hz	煤气 Town Gas	1200pa
燃气接驳 Fuel Pipe Connection	DN20x2		

Single Burner Large Wok Range


燃气单头大炒炉 (沟风炉头)

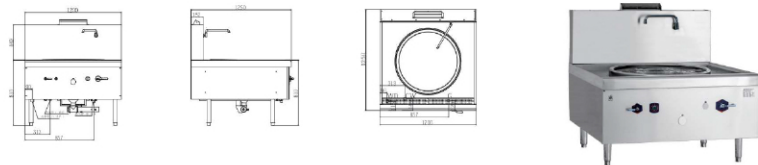

型号 Model	SDGT56-DHG		
尺寸 Dimension (WxDxH)mm	1200 × 1250 × (810+360)	炉前压力 Operating Pressure	
热负荷 Heat Input	56kW	天然气 Natural Gas	2000pa
来/去水接口 Water Inlet	φ15mm / φ48mm	石油气 L.P. Gas	2800pa
电源接驳 Loading/Voltage	0.15kW/220V/1Ph/50Hz	煤气 Town Gas	1200pa
燃气接驳 Fuel Pipe Connection	DN20		

Double Burner Large Wok Range

燃气双头大炒炉 (沟风炉头)

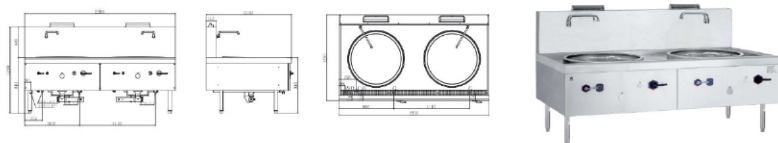

型号 Model	SDGT56/112-DHG		
尺寸 Dimension (WxDxH)mm	2200 × 1250 × (810+360)	炉前压力 Operating Pressure	
热负荷 Heat Input	56kWx2	天然气 Natural Gas	2000pa
来/去水接口 Water Inlet	φ15mm / φ48mm	石油气 L.P. Gas	2800pa
电源接驳 Loading/Voltage	0.30kW/220V/1Ph/50Hz	煤气 Town Gas	1200pa
燃气接驳 Fuel Pipe Connection	DN20x2		

产品优点 Feature

- 配置 5" 耐高温不锈钢炉头
- 运行噪音可低于65dB
- CO排放量少于0.01%
- 能源节约30%左右
- 熄火安全时间小于2秒
- 全不锈钢框架铆装结构, 不变形、稳固

- Equipped with 5" heat-resistant premix S/S burner
- The operation noise is below 65dB
- CO emissions volume is less than 0.01%
- Energy saving is about 30% lower than normal
- Long flame-out protection device will cut off the gas supply within 2 seconds
- Entire stainless steel riveted structure, stable and non-deformation

可选配件 Optional Accessories

调味板
Water pan
炸茜架
Sieve holder
炸茜架
Cast iron ring




不锈钢框架、
管路简便
STAINLESS STEEL FRAMEWORK



蒸炉炒炉一体
无缝台面
SEAMLESS TABLETOP

Cooking Range


粤式燃气单头单尾炒炉 (轻型沟风炉头)

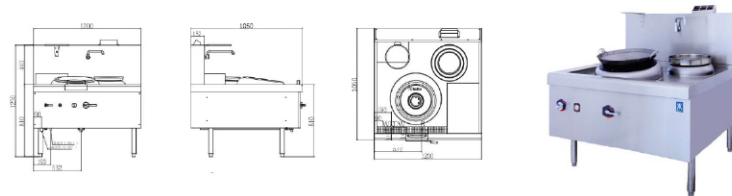

型号 Model	SZC48-DHGS		
尺寸 Dimension (WxDxH)mm	1200 × 1050 × (810+360)	炉前压力 Operating Pressure	
热负荷 Heat Input	48kW	天然气 Natural Gas	2000pa
来/去水接口 Water Inlet	φ15mm / φ56mm	石油气 L.P. Gas	2800pa
电源接驳 Loading/Voltage	0.15kW/220V/1Ph/50Hz	煤气 Town Gas	1200pa
燃气接驳 Fuel Pipe Connection	DN20		

Cooking Range

粤式燃气双头双尾炒炉 (轻型沟风炉头)

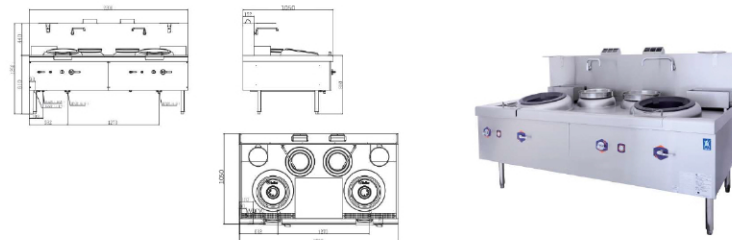

型号 Model	SZC48/96-DHGS		
尺寸 Dimension (WxDxH)mm	2200 × 1050 × (810+360)	炉前压力 Operating Pressure	
热负荷 Heat Input	48kWx2	天然气 Natural Gas	2000pa
来/去水接口 Water Inlet	φ15mm / φ56mm	石油气 L.P. Gas	2800pa
电源接驳 Loading/Voltage	0.30kW/220V/1Ph/50Hz	煤气 Town Gas	1200pa
燃气接驳 Fuel Pipe Connection	DN20x2		

Chop Suey Single Burner Wok Range

单头燃气杂碎炒炉 (沟风炉头)



型号 Model	SZC36-DHG		
尺寸 Dimension (WxDxH)mm	760 × 900 × (810+360)	炉前压力 Operating Pressure	
热负荷 Heat Input	36kW	天然气 Natural Gas	2000pa
来/去水接口 Water Inlet	φ 15mm /φ56mm	石油气 L.P.Gas	2800pa
电源接驳 Loading/Voltage	0.15kW/220V/1Ph/50Hz	煤气 Town Gas	1200pa
燃气接驳 Fuel Pipe Connection	DN20		

Chop Suey Double Burner Wok Range

双头燃气杂碎炒炉 (沟风炉头)

型号 Model	SZC36/72-DHG		
尺寸 Dimension (WxDxH)mm	1500 × 900 × (810+360)	炉前压力 Operating Pressure	
热负荷 Heat Input	36kWx2	天然气 Natural Gas	2000pa
来/去水接口 Water Inlet	φ 15mm /φ56mm	石油气 L.P.Gas	2800pa
电源接驳 Loading/Voltage	0.30kW/220V/1Ph/50Hz	煤气 Town Gas	1200pa
燃气接驳 Fuel Pipe Connection	DN20x2		

环保炒炉

ENVIRONMENTAL
COOKING
RANGE



- 耐高温S/S预混炉头
- 柔性风气联动系统
- 离子熄火保护系统连电子打火
- 静音工频风机


- Heat-resistant premix S/S burner
- Flexibility gas-wind linkage system
- Electronic ignition & ions flame failure device
- Mute power frequency fan

- 全整体炉砖隔热保温系统
- 全不锈钢框架结构等特种工艺
- 余热回收系统（可选）
- 定制搪瓷生铁圈，经久耐用

- Modular Stove-brick heat insulating system
- Entire stainless steel structure and special crafts
- Waste-heat recovery system (Optional)
- Customized enamel-coated cast-iron ring, strong and durable






不锈钢炉架
STAINLESS STEEL FRAMEWORK



环保炉头
ENVIRONMENTAL TYPE BURNER

Guangdong Style Environmental Cooking
Range-Single Burner with rear pot




粤式燃气环保单头单尾炒炉



型号 Model	SZC42-DH	
尺寸 Dimension (WxDxH)mm	1200 × 1250 × (810+360)	炉前压力 Operating Pressure
热负荷 Heat Input	42kW	天然气 Natural Gas 2000pa
来/去水接口 Water Inlet	φ15mm / φ48mm	石油气 L.P. Gas 2800pa
电源接驳 Loading/Voltage	0.15kW/220V/1Ph/50Hz	煤气 Town Gas 1200pa
燃气接驳 Fuel Pipe Connection	DN20	

Guangdong Style Environmental Cooking
Range Double Burner with rear pot

粤式燃气环保双头双尾炒炉



型号 Model	SZC42/84-DH	
尺寸 Dimension (WxDxH)mm	2200 × 1250 × (810+360)	炉前压力 Operating Pressure
热负荷 Heat Input	42kWx2	天然气 Natural Gas 2000pa
来/去水接口 Water Inlet	φ15mm / φ48mm	石油气 L.P. Gas 2800pa
电源接驳 Loading/Voltage	0.30kW/220V/1Ph/50Hz	煤气 Town Gas 1200pa
燃气接驳 Fuel Pipe Connection	DN20x2	

环保炒炉

煲仔炉

环保蒸柜


智能蒸柜

烧鸭 / 烧猪炉

蒸炉 / 肠粉炉

Gas Stock Single Pot Stove


燃气单头矮汤炉

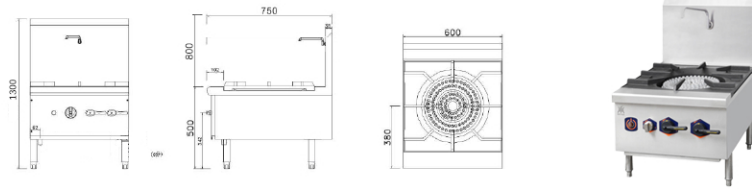

型号 Model	SPT14-DH(单圈/Single Ring)	SPT24-DH(双圈/Double Ring)
尺寸 Dimension (WxDxH)mm	550 x 650 x (500+800)	600 x 750 x (500+800)
热负荷 Heat Input	14kW	24kW
燃气接驳 Fuel Pipe Connection	DN20	DN20
配置炉头 TH Burner	8"强力炉头 TH Burner	14"强力炉头 TH Burner

Gas Stock Double Pot Stove

燃气双头矮汤炉

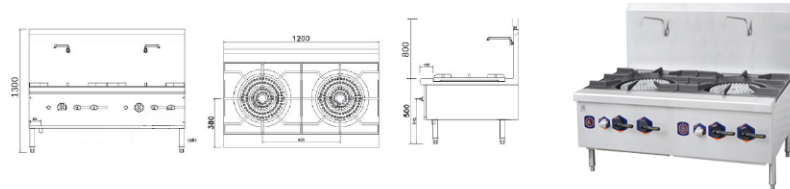

型号 Model	SPT14/28-DH(单圈/Single Ring)	SPT24/48-DH(双圈/Double Ring)
尺寸 Dimension (WxDxH)mm	1100x650x(500+800)	1200x750x(500+800)
热负荷 Heat Input	14kWx2	24kWx2
燃气接驳 Fuel Pipe Connection	DN20	DN20
配置炉头 TH Burner	8"强力炉头	14"强力炉头

产品优点 Feature


- 高效静音自然清风铸铝炉头，高效节能
- 设有热电偶熄火保护，安全可靠
- 设有易清洁接渣盆
- 特别定制搪瓷炉花板，经久耐用、不变色
- 运行噪音可低于60dB
- CO排放量少于0.01%
- 熄火安全时间小于2秒



- Silent cast aluminum burner, energy saving
- Equipped thermocouple flame failure protection device
- Equipped drip pan in order to clean easily
- Enamel plated cast iron grate, durable and fadeless
- The operation noise is below 60dB
- CO emissions volume is less than 0.01%
- Long flame-out protection device will cut off the gas supply within 2 seconds.

Gas 4 burner Boiling Table (Mandarin Burner)


燃气四头煲仔炉(文华炉头)

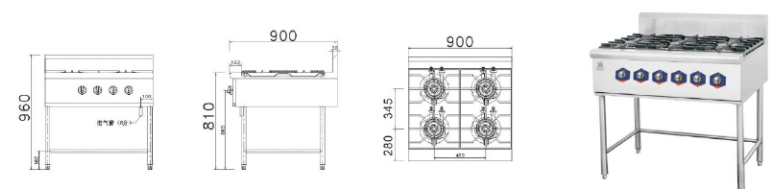

型号 Model	SPT5/20-DH(单圈/Single Ring)	SPT7/28-DH(双圈/Double Ring)
尺寸 Dimension (WxDxH)mm	900x760x(810+150)	800x900x(810+150)
热负荷 Heat Input	20kW	28kW
燃气接驳 Fuel Pipe Connection	φ19mm	φ19mm

Gas 6 burner Boiling Table (Mandarin Burner)

燃气六头煲仔炉(文华炉头)

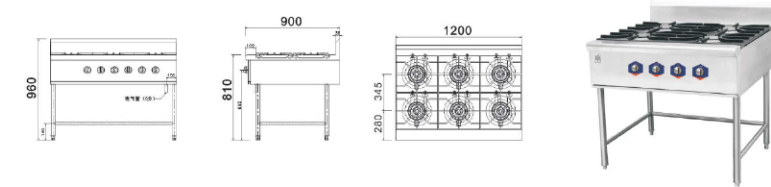

型号 Model	SPT5/30-DH(单圈/Single Ring)	SPT7/42-DH(双圈/Double Ring)
尺寸 Dimension (WxDxH)mm	900x760x(810+150)H	1200x900x(810+150)H
热负荷 Heat Input	30kW	42kW
燃气接驳 Fuel Pipe Connection	φ19mm	φ19mm

产品优点 Feature

- 高效静音自然清风铸铝炉头，高效节能
- 设有热电偶熄火保护，安全可靠
- 设有易清洁接渣盆
- 特别定制搪瓷炉花板，经久耐用、不变色
- 配置6"或7"文华炉头
- 运行噪音可低于60dB
- CO排放量少于0.01%
- 熄火安全时间小于2秒



- Silent cast aluminum burner, energy saving
- Equipped thermocouple flame failure protection device
- Equipped drip pan in order to clean easily
- Enamel plated cast iron grate, durable and fadeless
- Equipped 6" or 7" Mandarin burner
- The operation noise is below 60dB
- CO emissions volume is less than 0.01%
- Long flame-out protection device will cut off the gas supply within 2 seconds.

环保 / 智能蒸柜

SMART STEAMER
CABINET



- 不锈钢自然沟风预混喷射炉头
- 燃气款采用隧道式换热面大、耐高温火管的水胆
- 专利设计的蒸箱结构
- 独立圆角内胆-不串味、节能、易清洁
- 离子熄火保护连电子打火系统

- Stainless steel premix injection burner
- Multi contact heat-resistant tunnel heat-exchanger
- Patented design steam box
- Individual rounded corner-tainting-proof, energy-efficient, easy-clean
- Electronic ignition & ions flame-out protection device

- 蒸腔顶部防冷凝水系统
- 防水垢及水垢清除系统
- 余热回收系统 (可选)
- 柜胆顶部辅热, 没有蒸汽凝露, 极大地改善了菜品的品质
- 多重控制, 手自一体操作, 可靠耐用

- Anti-condensation system at top of steam chamber
- Cleaning and control system of scale deposit on water
- Waste-heat recovery system (Optional)
- Heated tops of the inner cells prevent steam condensation, extraordinary improving the taste
- Multiple controls with manual and automatic control, reliable and stable



SLANTED TOP TO PREVENT
CONDENSATION DRIPPING




V-SHAPED ANTI DRIP DESIGN
OF THE TANK ROUND CORNER
CONNECTION



ACCESSIBLE BOILER TANK

Environmental Cabinet Steamer Single Door

环保单门蒸柜



型号 Model

SZX42-M1 🔥🔥

尺寸 Dimension (WxDxH)mm

800 × 880 × 1865

热负荷 Heat Input

42kW

来/去水接口 Water Inlet




φ15mm/φ38mm

电源接驳 Loading/Voltage

/

Environmental Cabinet Steamer Single Door

电热单门蒸柜



型号 Model

EZX27-M1 🔥

尺寸 Dimension (WxDxH)mm

700 × 900 × 1865

热负荷 Heat Input

27kW

来/去水接口 Water Inlet

φ15mm/φ38mm

电源接驳 Loading/Voltage


/

- 不锈钢自然沟风预混喷射炉头
- 燃气款采用隧道式换热面大、耐高温火管的水胆
- 专利设计的蒸箱结构
- 独立圆角内胆-不串味、节能、易清洁
- 离子熄火保护连电子打火系统
- 蒸腔顶部防冷凝水系统
- 防水垢及水垢清除系统
- 余热回收系统 (可选)
- 柜胆顶部辅热, 没有蒸汽凝露, 极大地改善了菜品的品质
- 多重控制, 手自一体双重控制, 可靠耐用

- Stainless steel premix injection burner
- Multi contact heat-resistant tunnel heat-exchanger
- Patented design steam box
- Individual rounded corner-tainting-proof, energy-efficient, easy-clean
- Electronic ignition & ions flame-out protection device
- Anti-condensation system at top of steam chamber
- Cleaning and control system of scale deposit on water
- Waste-heat recovery system (Optional)
- Heated tops of the inner cells prevent steam condensation, extraordinary improving the taste
- Multiple controls with manual and automatic control, reliable and stable

Cabinet Steamer Double Door


对开门蒸柜

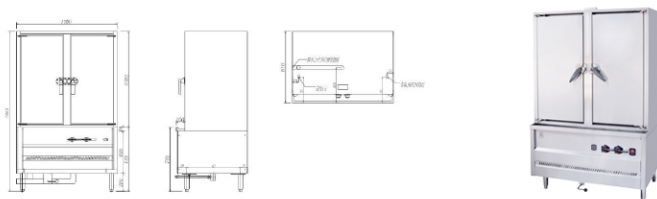

型号 Model	SZX56-M2
尺寸 Dimension (WxDxH)mm	1150 × 880 × 1865
热负荷 Heat Input	56kW
来/去水接驳口 Water Inlet	φ15mm/φ38mm
电源接驳 Loading/Voltage	/

Environmental Cabinet Steamer Three Door

环保三门蒸柜

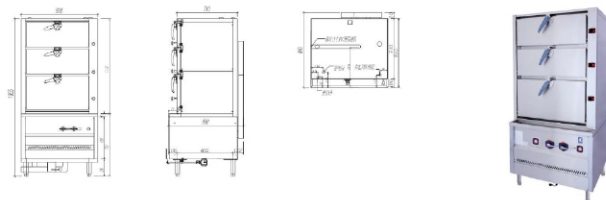

型号 Model	SZX42-M3
尺寸 Dimension (WxDxH)mm	900 × 880 × 1865
热负荷 Heat Input	42kW
来/去水接驳口 Water Inlet	φ15mm/φ38mm
电源接驳 Loading/Voltage	/
燃气接驳 Fuel Pipe Connection	DN20

产品优点 Feature

- 配置3个14kW不锈钢预混
- 自然沟风喷射炉头
- 运行噪音可低于60dB
- Co排放量少于0.01%
- 能源节约30%左右
- 熄火安全时间小于2秒




- Equipped 3no.s 14kW S/S Premix injection burner
- The operation noise is below 60dB
- Co emissions volume is less than 0.01%
- Energy saving is about 30% lower than normal
- Ions flame-out protection device will cut off the gas supply within 2 seconds

【可选配件】> 不锈钢层网,400x600蒸盆
Optional Accessories Stainless steel shelving 400x600 GN pan

Environmental Cabinet Steamer Three Door

环保大三门蒸柜

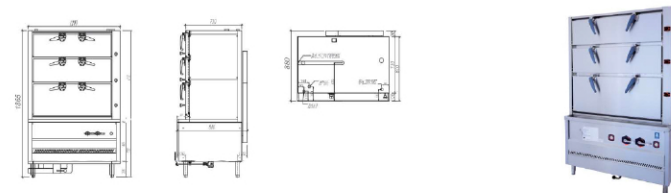


型号 Model	SZX56-M3D
尺寸 Dimension (WxDxH)mm	1200 × 880 × 1865
热负荷 Heat Input	56kW
来/去水接驳口 Water Inlet	φ15mm/φ38mm
电源接驳 Loading/Voltage	/
燃气接驳 Fuel Pipe Connection	DN20

炉前压力	天然气 2000pa
	石油气 2800pa
	煤气 1200pa

Three Door Smart Cabinet Steamer

智能三门蒸柜 (每层2/1GN盆)

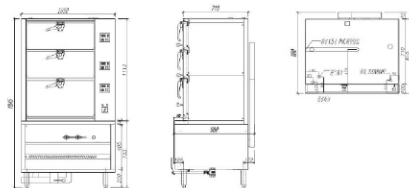

型号 Model

SZX42-M3D **AA**

尺寸 Dimension (WxDxH)mm

1050 × 880 × 1865

热负荷 Heat Input

42kW

来/去水接口 Water Inlet


φ15mm/φ38mm

电源接驳 Loading/Voltage

220V/50Hz/200W

Electric Three Door Big Smart Cabinet Steamer

智能电大三门蒸柜 (每层2/1GN盆)

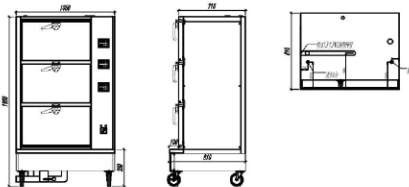

型号 Model

SZX42-M3DS **AA**

尺寸 Dimension (WxDxH)mm

1050 × 880 × 1800

热负荷 Heat Input

42kW

来/去水接口 Water Inlet

φ15mm/φ38mm

电源接驳 Loading/Voltage

220V/50Hz/200W

产品优点 Feature

- 160度高温跳制, 300kpa高压泄压阀
- 结垢或缺水保护开关及高敏漏电保护开关
- 余热回收系统 (可选) 给水胆提供热水
- 可徒手打开水箱, 方便彻底清洗水垢
- 柜胆顶设有预热除冷凝水功能


- 160°C high temperature protection system and 100kpa high pressure protection system
- Water-lacking protection switch, and confect creepage safeguard equipment
- The hot water from waste-heat recovery only be used for the water tank.
- Water tank can be opened by hand, easy for cleaning up limescale
- Equipped with the device that remove the condensation by preheating

可选配件

不锈钢GN盆
Stainless steel GN Pan

Four Door Smart Cabinet Steamer

智能四门蒸柜 (直向置1/1GN盆)

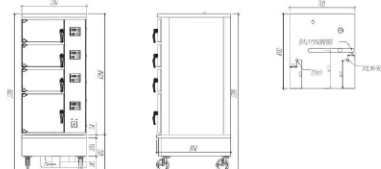

型号 Model

SZX24-M4 **AA**

尺寸 Dimension (WxDxH)mm

800 × 800 × 1730

热负荷/电功率 Heat Input/Power

24kW

来/去水接口 Water Inlet


φ15mm/φ38mm

电源接驳 Loading/Voltage

220V/50Hz/200W

Four Door Smart Cabinet Steamer

智能四门蒸柜 (横向置1/1GN盆)

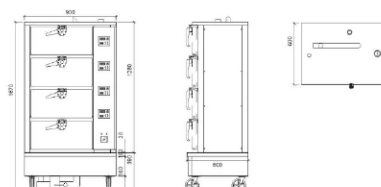

型号 Model

SZX24-M4B **AA**

尺寸 Dimension (WxDxH)mm

1150 × 600 × 1670

热负荷/电功率 Heat Input/Power

24kW

来/去水接口 Water Inlet

φ15mm/φ38mm


电源接驳 Loading/Voltage

220V/50Hz/200W


产品优点 Feature



智能蒸柜全面角卫生与方便拆卸挂码内胆
CURVE CORNER FOR HYGIENE AND DETACHABLE HANGING SHELVE



热柜方便拆卸挂码
DETACHABLE HANGING SHELVE



可开蒸柜门徒手打开水箱
箱盖清洗水垢
ACCESSIBLE BOILER TANK



手自一体双重控制, 可靠耐用
ONE PRESS DESIGN FOR FRAME FAILURE DEVICE AND DILATION



智能蒸柜内胆
SMART INNER TANK




独立圆角内腔, 不串味, 节能
CURVE CORNER FOR HYGIENE



Touch Screen Smart Steam Cabinet (Double Door)

液晶触控智能蒸柜（双门）

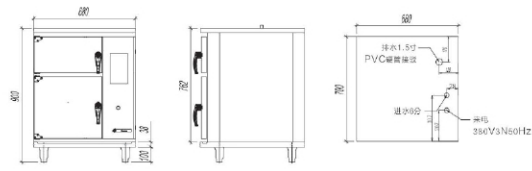

型号 Model

SZX24-M2 **

尺寸 Dimension (WxDxH)mm

680 × 800 × 900

热负荷/电功率 Heat Input/Power

14kW

来/去水接口 Water Inlet


φ15mm/φ38mm

电源接驳 Loading/Voltage

220V/50Hz/200W

Touch Screen Smart Steam Cabinet (Four Door)

液晶触控智能蒸柜（四门）

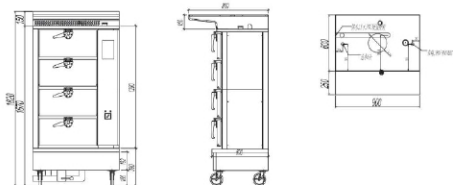

型号 Model

SZX24-M4B **

尺寸 Dimension (WxDxH)mm

900 × 850 × 1820

热负荷/电功率 Heat Input/Power

24kW

来/去水接口 Water Inlet

φ15mm/φ38mm


电源接驳 Loading/Voltage

220V/50Hz/200W



Smart Roll-in Cabinet Steamer (40no. s GN1/1)

智能车载蒸柜（40盘GN1/1）

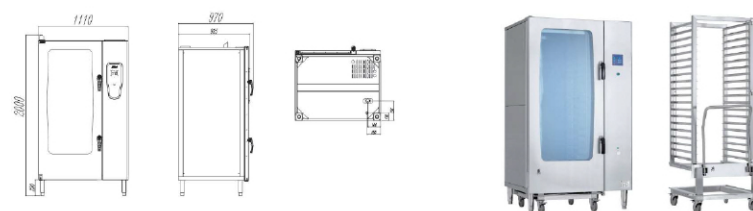

型号 Model

SZX48-P40 **

尺寸 Dimension (WxDxH)mm

1110 × 970 × 2000

热负荷/电功率 Heat Input/Power

48kW

来/去水接口 Water Inlet

φ15mm/φ38mm

电源接驳 Loading/Voltage

220V/50Hz/200W

产品特点 Feature

可选配件 > 不锈钢GN1/1盆车及GN盆 Optional Accessories Stainless steel GN 1/1 Cart and GN pan

- 160度高温跳制，100kpa高压泄压阀
- 结垢或缺水保护开关及高敏漏电保护开关
- 余热回收系统（可选）仅给水胆提供热水

- Equipped 3no.s 9kW Incoloy 800# heater
- Equipped 4no.s 9kW Incoloy 800# heater
- 160°C high temperature protection system and 100kpa high pressure protection system
- Water-lacking protection switch, and confection creepage safeguard equipment
- The hot water from waste-heat recovery only be used for the water tank




- 微电脑智能双重控制系统
- 耐高温热交换器与余热回收系统
- 一体化设计（无烟卤）
- 蒸汽二次升温系统
- 专门设计的蒸箱结构
- 独立圆角内胆—不串味，节能
- 多重安全保障系统

- Microcomputer dual control system
- Heat-resistant heat-exchanger and waste-heat
- Independent operation and avoid tinting,
- Steam heated by two stage system
- Patented designed for steam box
- filleted corner in box-inside and no sanitary dead angle
- Multiple safety guarantee system

Single Steamer

环保单头蒸炉

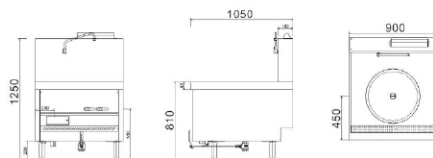

型号 Model

SZX-1B-G

尺寸 Dimension (WxDxH)mm

900 × 1050 × (810+360)

热负荷/电功率 Heat Input/Power

28kW

来/去水接口 Water Inlet


φ15mm/φ38mm

电源接驳 Loading/Voltage

100W/220V/1Ph/50Hz

Double Environmental Steamer

环保双头蒸炉

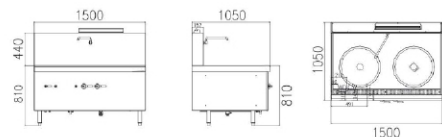

型号 Model

SZX-2B-G

尺寸 Dimension (WxDxH)mm

1500 × 1050 × (810+360)

热负荷/电功率 Heat Input/Power

42kW

来/去水接口 Water Inlet

φ15mm/φ38mm

电源接驳 Loading/Voltage

100W/220V/1Ph/50Hz

燃气接驳 Fuel Pipe Connection

φ19mm

产品优点 Feature

- 配置3个14kW不锈钢自然沟风喷射炉头
- 运行噪音可低于60dB
- CO排放量少于0.01%
- 能源节约30%左右
- 熄火安全时间小于2秒

- Equipped 3no.s 14kW S/S Premix injection burner
- The operation noise is below 60dB
- CO emissions volume is less than 0.01%
- Energy saving is about 30% lower than normal
- Ion flame-out protection device will cut off the gas supply within 2 seconds

可选配件
Optional Accessories

肠粉隔 Rice Roll Tray
7星板 7-hole plate
蒸笼(ø540) S/S food steamer(ø540)

Pig Roaster

烤猪炉



型号

SSK50-Z

尺寸 Dimension (WxDxH)mm

620x1100x600

热负荷 Heat Input


50kW

来气管 Gas Pipe

3/4"

Duck Roaster

烤鸭炉

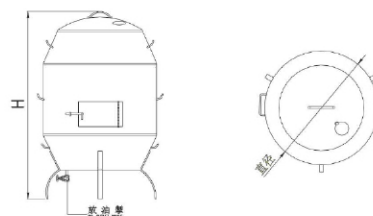

型号

SKX16-YD32

SKX16-YD36

SKX16-YD39

尺寸 Dimension (WxDxH)mm

800x1500

900x1550

1000x1600

热负荷 Heat Input

16kW

16kW

16kW

来/去水接口 Water Inlet

φ15mm/φ38mm

φ15mm/φ38mm

φ15mm/φ38mm

产品优点 Feature

- 铸铁自然沟风预混炉头，高效节能
- 设有热电偶熄火保护，安全可靠
- 设有可拖出易清洁接渣盆，卫生美观
- 特别定制搪瓷炉花板，经久耐用，不变色

- Silent cast aluminum ring, energy saving
- Equipped thermocouple flame failure protection device
- Equipped drip pan in order to clean easily
- Enamel plated cast iron grate, durable and fadeless



蒸炉 肠粉炉

STEAMER
RICE ROLL STEAMER



- 燃气款采用创新螺旋火管技术, 增大受热面积, 热效率提升30%
- 全新隔热设计, 减少热量损失
- 一键式开关, 自动点火和熄火装置, 安全快捷去水装置及时清理水垢


- Innovation spiral fire tube technology, increase the heating surface, thermal efficiency is increased by 30%
- New heat insulation design, reducing the heat loss
- One click switch, automatic ignition and cut-off device, safety and convenient, cleaning lime scale valve in time

- 高效节能, 经久耐用
- 电热款电子全自动控制
- 手动除水垢装置, 卫生耐用

- high efficiency and energy saving
- LED digital control panel, time and temperature can be displayed visually, multiple program automatic control
- Manual descaling device, health and durable

Single Rice Roll Steamer


环保单头肠粉炉

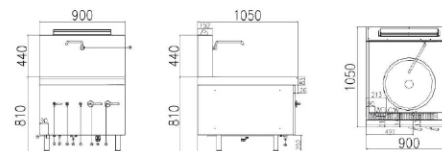

型号	SZX-1T-G
尺寸 Dimension (WxDxH)mm	800 × 1050 × (810+360)
热负荷/电功率 Heat Input/Power	42kW
来/去水接口 Water Inlet	φ15mm/φ38mm
电源接驳 Loading/Voltage	100kW/220V/1Ph/50Hz
燃气接驳 Fuel Pipe Connection	φ19mm

Double Roll Rice Steamer

环保双头肠粉炉

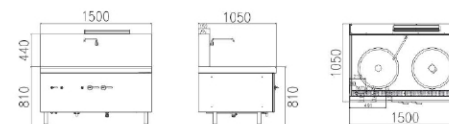

型号	SZX-2T-G
尺寸 Dimension (WxDxH)mm	1500 × 1050 × (810+360)
热负荷/电功率 Heat Input/Power	42kW
来/去水接口 Water Inlet	φ15mm/φ38mm
电源接驳 Loading/Voltage	0.01kW/220V/1Ph/50Hz
燃气接驳 Fuel Pipe Connection	φ19mm

产品特点 Feature

- 160度高温跳制, 100kpa高压泄压阀
- 结垢或缺水保护开关及高敏漏电保护开关
- 余热回收系统 (可选) 仅给水胆提供热水
- 可徒手打开水胆, 清洗水垢
- 柜胆设有预热除冷凝水功能

- 160 degree high temperature protection system and 100kpa high pressure protection system
- Water-lacking protection switch, and confection creepage safeguard equipment
- The hot water from waste-heat recovery only be used for the water tank.

可选配件 Optional Accessories

Rice Roll Tray
7星板
7-hole plate
蒸笼(φ540)
S/S food steamer(φ540)